

### 36Z-METER TRUCK-MOUNTED SPECIFICATIONS

Length	36' 5"	(11.10m)
Width	8' 2"	(2.50m)
Height	12' 9"	(3.90m)
Wheelbase	223"	(5,664mm)
Front axle weight	18,164 lbs	(8,239kg)
Rear axle weight	33,966 lbs	(15,407kg)
Approx. total weight	52,130 lbs	(23,646kg)

Based on Model MACK MRU 613 with .16H pump cell.

Weights are approximate and include pump, boom, truck, driver and some fuel. Dimensions will vary with different truck makes, models and specifications.

### BOOM SPECIFICATIONS | Z-FOLD DESIGN

<b>Height &amp; Reach</b>		
Vertical reach	116' 10"	(35.61m)
Horizontal reach	103' 0"	(31.39m)
Reach from front of truck*	94' 10"	(28.91m)
Reach depth	78' 5"	(23.90m)
Unfolding height	27' 11"	(8.51m)

#### 4-Section Boom

1st section articulation	104°	
2nd section articulation	180°	
3rd section articulation	253°	
4th section articulation	225°	
1st section length	27' 11"	(8.51m)
2nd section length	24' 11"	(7.59m)
3rd section length	24' 11"	(7.59m)
4th section length	25' 11"	(7.90m)

#### General Specs

Pipeline Size (ID) metric ends	5"	(125mm)
Rotation	365°	
End hose—length	10' 0"	(3.00m)
End hose—diameter	5"	(125mm)
Outrigger spread L-R—front	18' 1"	(5.51m)
Outrigger spread L-R—rear	23' 0"	(7.00m)
	hydraulically extend out & down	
	hydraulically swing out & extend down	

### PUMP SPECIFICATIONS



	36Z.12H	36Z.16H
Output — rod side	144 yd <sup>3</sup> /hr (110m <sup>3</sup> /hr)	210 yd <sup>3</sup> /hr (160m <sup>3</sup> /hr)
Output — piston side	97 yd <sup>3</sup> /hr (74m <sup>3</sup> /hr)	141 yd <sup>3</sup> /hr (108m <sup>3</sup> /hr)
Pressure — rod side	1,233 psi (85 bar)	1,233 psi (85 bar)
Pressure — piston side	1,885 psi (130 bar)	1,885 psi (130 bar)
Material cylinder diameter	9" (230mm)	9" (230mm)
Stroke length	83" (2,100mm)	83" (2,100mm)
Maximum strokes per minute		
— rod side	21	31
— piston side	14	21
Volume control	0-Full	0-Full
Vibrator	Standard	Standard
Hard-chromed material cylinders	Standard	Standard
Hydraulic system	Free Flow	Free Flow
Hydraulic system pressure	5,075 psi (350 bar)	5,075 psi (350 bar)
Differential cylinder diameter	5.5" (140mm)	5.5" (140mm)
Rod diameter	3.1" (80mm)	3.1" (80mm)
Maximum size aggregate	2.5" (63mm)	2.5" (63mm)
Water tank—pedestal	185 gal (700L)	185 gal (700L)

Maximum theoretical values listed.


\* Applies to units mounted on PMA stock truck — MACK MRU 613

- Standard delivery line system rated at max line pressure of 1,233 psi (85 bar)

- Ergonic Pump System (EPS) is standard.

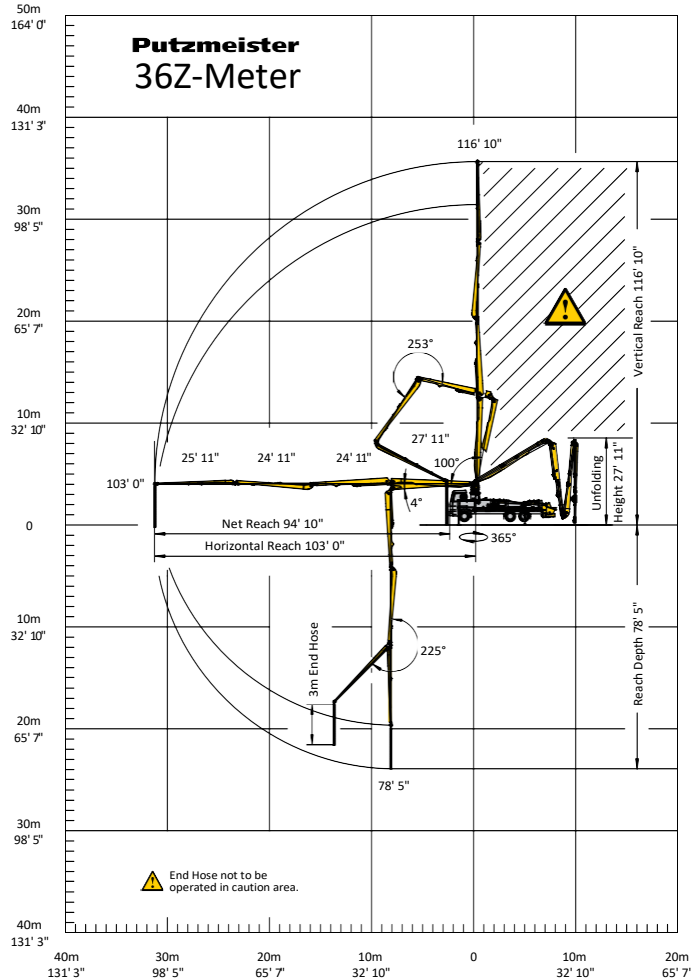


With One-Sided Support (OSS) 120°

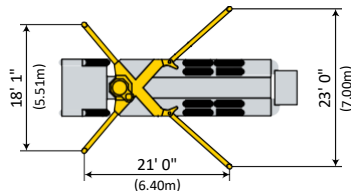

Photos and drawings are for illustrative purposes only.

Authorized Distributor



Putzmeister America, Inc. Phone (262) 886-3200  
 1733 90th Street Toll-free (800) 884-7210  
 Sturtevant, WI 53177 USA Fax (262) 884-6338

CT 4427-1 US



© Putzmeister America, Inc. 2015 Printed in the USA (2.01412)

PutzmeisterAmerica.com

pmr@putzam.com